

START HERE

Quick Start — Read This First

TIP:
In order to prevent leakage and can expansion during transportation, we reserve some space in the can.

We promise that the weight of the product is sufficient. If you receive the package, please check if the safety pull ring is intact immediately. Please contact the platform customer service right away if the can leaks, and we will get back to you as soon as possible.

Always mix thoroughly

No streaks. No clumps. No color variation.

- Allow primer to dry completely (7 days).
- Use promptly after opening. Do NOT store.

Critical Application Steps

Use promptly after opening. Do not store.

1. Surface Preparation

Ensure the surface is clean, dust-free, stable, and completely dry.



2. Mixing & Dilution

Always mix thoroughly.



If dilution is needed, less than 5% water can be added.

CRITICAL-SHAKE OR STIR WELL BEFORE USE

*No streaks. No clumps. No color variation.
Mixture must appear fully blended and consistent throughout.

3. Application

After mixing, brush thinly several times. We recommend 2 coats for dark paints, 3-4 coats for light colors, and 1-2 coats more for darker substrates.

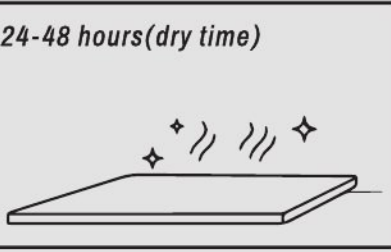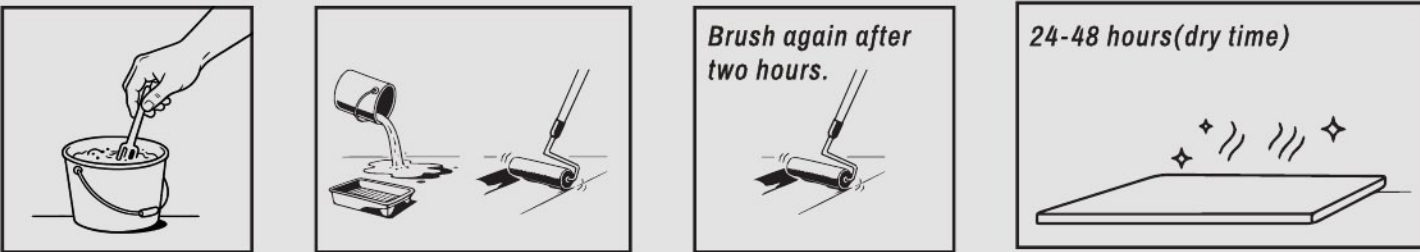

Wood Furniture Paint 



Wood Furniture Paint

One system. Many rooms. Same result.

One wood system. Endless possibilities.
From everyday messes to high-traffic living, Dwila AZ adapts effortlessly.



Door



Chair



Dresser



Cabinet



Table



Decorative wood piece

WHAT YOU NEED TO KNOW BEFORE PAINTING

TEMPERATURES / 41-104°F (5-40°C)
HUMIDITY < 80%

Applicable: Furniture, cabinets, doors, trim, wooden floors, and various solid wood or engineered wood surfaces.
Prohibited: Unpeeled logs, wet/rotting wood, metal, glass, tiles, or surfaces with loose old paint. Returns available for unsuitable surfaces.
Application: 2 coats for light areas, 3-4 for dark. Ensure sufficient paint beforehand.

SURFACE CONDITIONS

Wood Surfaces: Ensure the wood is structurally sound, clean, and completely dry prior to application. Keep free of dust, oil, grease, resin, and old wax.

MIXING & APPLICATION

Important: Stir thoroughly from the bottom of the can before use to ensure even color. No mixing with other types of paint. If thinning is required, add less than 5% water and mix well. Close the lid tightly after use to prevent the paint from drying out.

1. Avoid standing water and extreme cold for long periods.
2. Apply only in daytime (no cloudy/rainy days); allow natural drying.
3. Do not mix with other paints or oil-based coatings.
4. No direct fan airflow during application and drying.

Clean-Up: Dispose of waste per local rules. Clean tools promptly.

Tip: Lightly sand the wood surface along the grain before painting and between coats for the smoothest finish and stronger adhesion.

ALLOW TO DRY:

Touch dry: 24 hours / Light use: 36-48 hours / Full cure: 7 days
No scrubbing or heavy cleaning during this period.

PERFORMANCE DISCLAIMER

RESULTS VARY WITH SURFACE PREP, APPLICATION, ENVIRONMENT AND SITE CONDITIONS; WOOD SPECIES AND SURFACES DIFFER.

Maintenance & Care: Clean with mild detergent & water; avoid harsh chemicals, abrasives and metal scrapers.

SAFETY

1. DO NOT TAKE INTERNALLY.
2. AVOID CONTACT WITH EYES AND SKIN.
3. USE WITH ADEQUATE VENTILATION.
4. KEEP OUT OF REACH OF CHILDREN.
5. IF YOU EXPERIENCE EYE WATERING, HEADACHE, OR DIZZINESS, LEAVE THE AREA TO OBTAIN FRESH AIR. IF CONTINUED DIFFICULTY IS EXPERIENCED, SEEK MEDICAL ATTENTION IMMEDIATELY.